


USALED-T8U6BA SERIES

T8 U BEND
SINGLE END/DOUBLE END POWERED
BALLAST BYPASS
DLC, UL LISTED

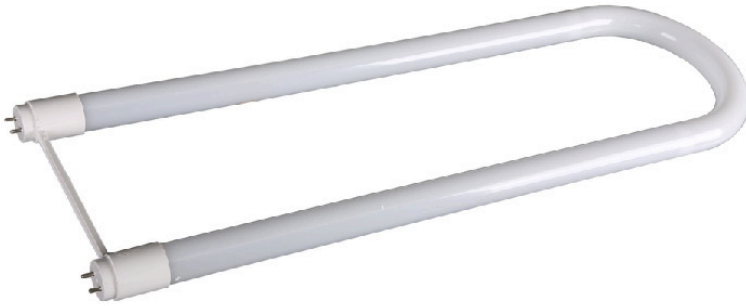

Nominal Specifications
LifeLux™ STD Rating

Length

2ft,

Power

18W

Voltage

100-277V

Lumen Output

150 Lm/W

Color Temperature

Lens

Glare Free Frosted

Design Life

50,000 hrs

Beam Angle

280 degrees

CRI

>80

Power Factor

>0.90

Warranty

5 Year Manufacturers Limited Warranty

CERTIFICATIONS

UL, DLC, ETL

DIMENSIONS

48" x 2/3" DIA

Material of Construction

PC Cover

ORDERING DATA: Per chart below

Example : **USALED-T8U6BA-18-CCK-15**

XXXXXX	XXXXXX	XXXXXX	XXXXXX	15
USALED	Model	Wattage	Color Temp	15
	T8U6BA	18 = 18W	30K = 3000K	
			35K = 3500K	
			40K = 4000K	
			50K = 5000K	

APPLICATIONS

Offices, Retail Stores, Hospitals, Grocery Stores, Utility Rooms, Industrial Settings, Stairwells, Commercial Buildings, Hotels, Restaurants