


GRWSL SERIES

LED MODULAR FULL SPECTRUM GROW LIGHT

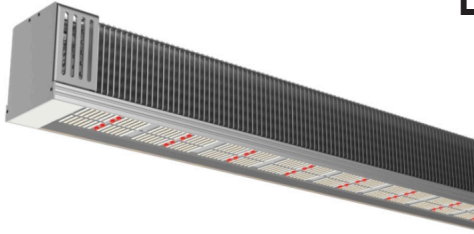

- ✓ UL & CE Certified-DLC Pending
- ✓ IP65 Weather Rating
- ✓ Supports Full, R&B, As Well As Custom Spectrums
- ✓ 5 Year Limited Manufacturers Warranty
- ✓ 50,000 Hour Rated Lifetime
- ✓ Fanless Design

Nominal SPECIFICATIONS
LifeLux™ STD Rating

Power
 330W, 530W, 660W

Voltage
 100-277V, 200-480V

Color Spectrum
 FSS, FSM, FSG

Dimmable
 0-10V, Dali Dimming, RJ14 Dim Socket

Design Life
 50,000 hrs

Frequency
 50/60Hz

Power Factor
 >0.90

Warranty
 5 Year Manufacturers Limited Warranty

Ingress Protection Rating
 IP 65


Dimensions
 39.4" x 5.1" x 7.9" 18.3 lbs
 44.9" x 5.1" x 7.9" 22.5 lbs
 59.1" x 5.1" x 7.9" 25.6 lbs

Certifications
 DLC Pending, UL 8800, ETL, CE

Features
 Fanless Design, Lights can be connected in series, **2 versions available**

Series	Power	Spectrum	μmol/J				PPF (μmol/s)	Dimension	Weight
			2.2	2.4	2.6	2.7			
USALED-GRWSL	330W	FSS				✓	891	39.4" x 5.1" x 7.9"	18.3 lbs
		FSM	✓	✓			726/792		
		FSG		✓	✓		792/858		
	530W	FSS				✓	1431	44.9" x 5.1" x 7.9"	22.5 lbs
		FSM	✓	✓			1166/1272		
		FSG		✓	✓		1272/1378		
	660W	FSS				✓	1782	59.1" x 5.1" x 7.9"	25.6 lbs
		FSM	✓	✓			1452/1584		
		FSG		✓	✓		1584/1716		

GRWSL IES

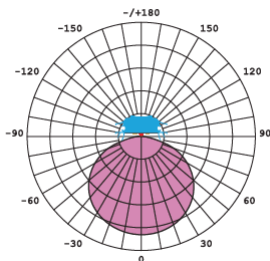

GRWSL KITS

Starter Wire Kit



Advance Wire Kit



2'x4'

134	142	132
143	148	137
136	145	133

330W 2.4 μmol/J 12" Height

2'x4'

101	107	99
108	112	103
103	109	100

330W 2.4 μmol/J 24" Height

2'x4'


136	145	134
156	161	152
147	157	148

530W 2.4 μmol/J 12" Height

2'x4'

103	105	100
118	121	115
110	118	111


530W 2.4 μmol/J 12" Height

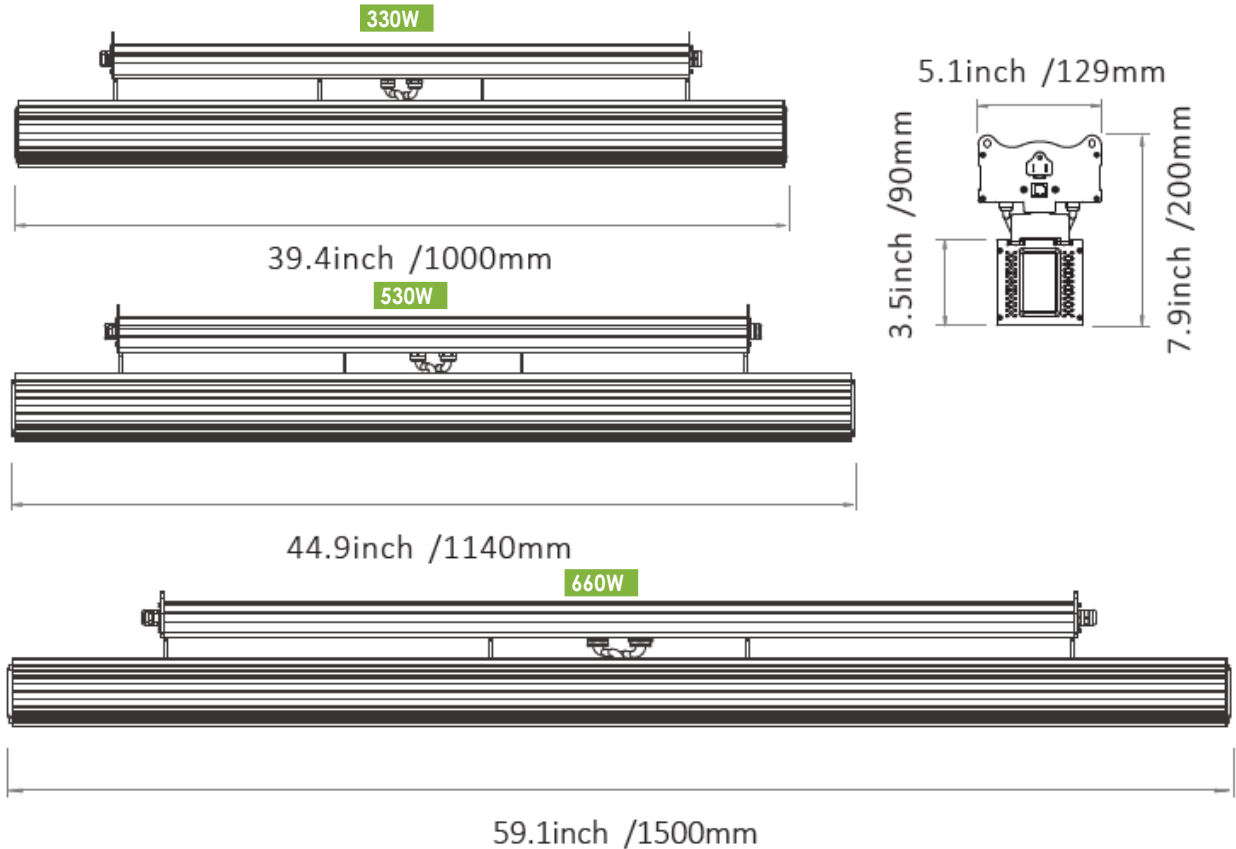


GRWSL INSTALL

Installation made easy!

1. Set the hooks on the beam.

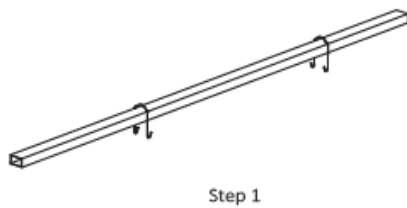

2. Hang the light into hooks.

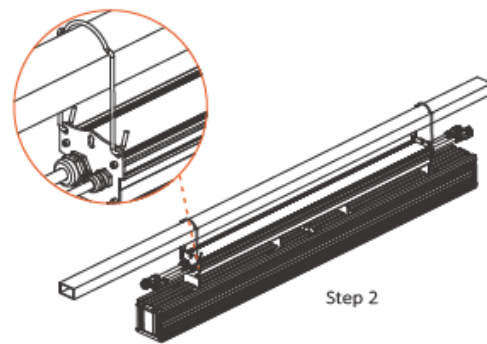

APPLICATION

